

AEROSIL® and SIPERNAT® for free flowing and non-caking sugars and sugar alcohols

Technical Information 1386



AEROSIL® and SIPERNAT® products help to avoid lumps in sugars and sugar alcohols

Nearly everyone has discovered the downsides of hygroscopic carbohydrates. Due to the high number of polar hydroxyl-groups in those molecules, they greedily attract moisture from the environment. Agglomerates and hard lumps as a consequence are difficult to process further.

To ensure a convenient as well as efficient handling of sugars without time and resource consuming measures to break agglomerates again, it is important to reduce caking and avoid formation of lumps reliably.

Some examples of carbohydrates that benefit from the treatment with SIPERNAT® precipitated silica or AEROSIL® fumed silica

- Fructose
- Glucose
- Lactose
- Sucrose
- Confectioner's sugar
- Brown sugar and caster sugar
- Polysaccharides, such as Maltodextrin, Polydextrose or even starches
- Sugar substitutes, e.g. Xylitol, Sorbitol and other Polyols

Reasons for carbohydrate agglomeration and prevention


As soon as the humidity in the environment reaches a concentration specific to each carbohydrate, they immediately start taking up moisture from the vapor phase. This relative humidity is defined as water activity of the substance.

At which point the carbohydrate commences picking up water depends, amongst others, on the chemical nature of the substance, its purity and particle size. Impurities and smaller particle sizes increase the hygroscopicity, meaning moisture is absorbed already at lower ambient humidity [1].

Figure 1 compares the water content of various sugars and polyols depending on the relative humidity of the atmosphere. In Figure 1 it can be seen, that Fructose tends to take up moisture already at relatively low humidity. It is one of the most hygroscopic carbohydrates, followed by polyols such as Sorbitol and Xylitol.

Figure 1

Water uptake of various sugars and polyols depending on relative humidity in the atmosphere. [Based on 1, 2, 3]

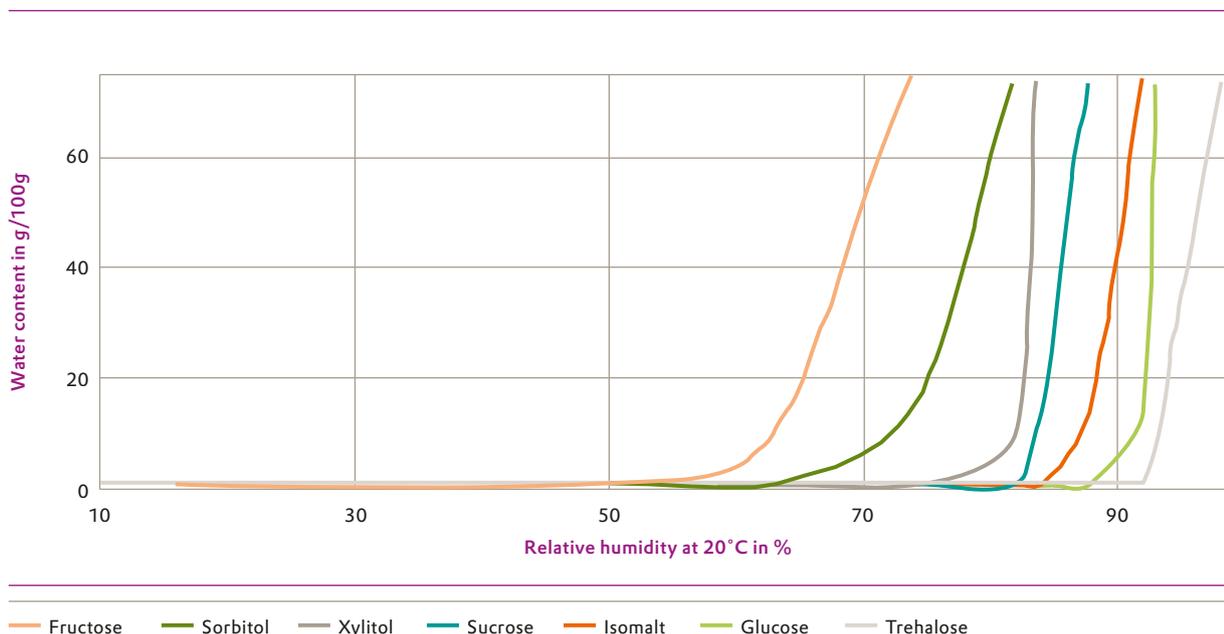

The absorbed water builds liquid bridges between the individual particles causing them to agglomerate. At continued exposure to moisture some amount of the carbohydrate becomes dissolved in this water and – when dry again – at lower relative humidity, the carbohydrate will re-crystallize resulting in solid bridges between the particles which leads to the formation of very hard lumps. This principle is demonstrated in Figure 2.

SIPERNAT® precipitated silica and AEROSIL® fumed silica can prevent the formation of these liquid or even solid bridges. The silica absorbs the water film on the surface thereby breaking liquid bridges and avoiding growth of solid bridges.

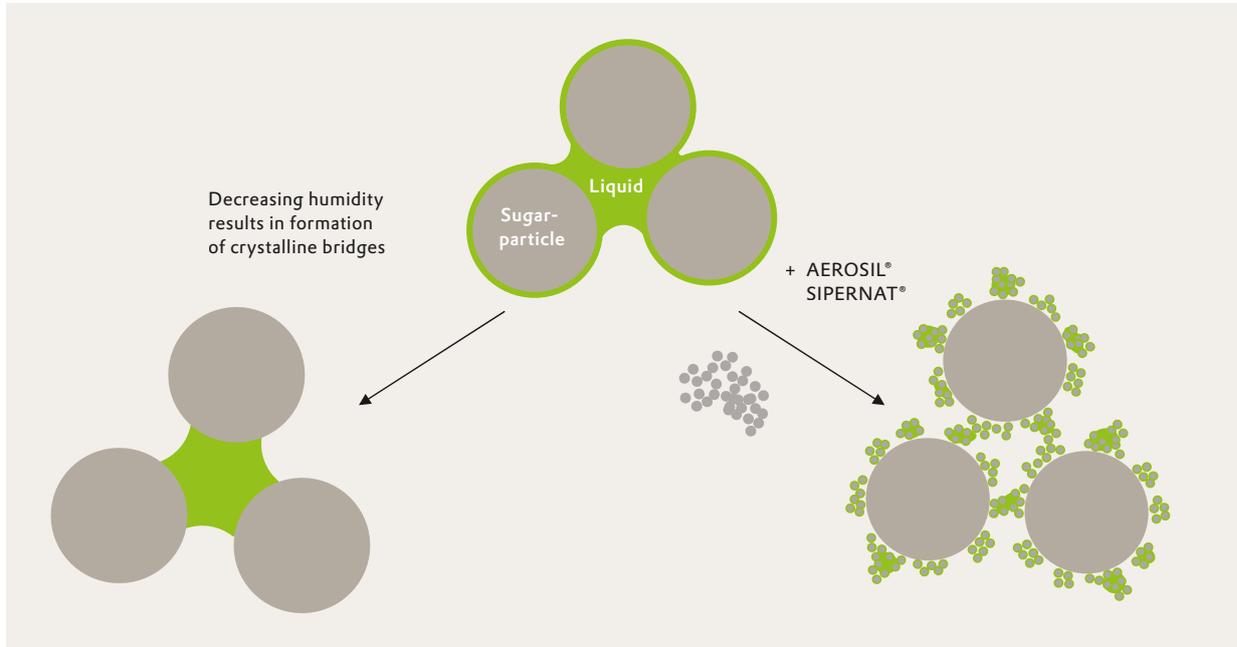


Figure 2
Model describing caking and caking-avoidance by silica of moist and hygroscopic powders.

Additionally, the silica acts as a spacer avoiding direct contact between the individual carbohydrate crystals. Especially very fine powders, such as confectioner’s sugar, tend to cake as the small particles come into close contact to each other. Increasing the distance between the individual particles is important to reducing the attraction forces between those small particles and thus improving the flowability of the fine sugar grades.

Detailed information on the mode of action of silicon dioxide to improve and ensure powder flowability can be found in the Technical Information 1351 “SIPERNAT® and AEROSIL® as Flow Aid and Anticaking Agent” [4].

Example: caking because of moisture uptake

As described in Figure 1, Xylitol is very hygroscopic; it tends to pick up moisture from the environment very fast. Even when stored at room temperature and humidity levels well below the water activity of this polyol, it absorbs water and forms large lumps decreasing the flowability.

Figure 3 (left side) shows the result of keeping Xylitol in a sealed glass bottle at ambient conditions. It is obvious that the material is nearly completely caked and therefore not able to flow through the largest funnel opening. This poor flowability is classified as flow grade 7.

Defined glass funnels can be used to determine flow properties of powders. The powder that flows out without interruption through a smaller outlet diameter of the funnel has a better flowability.

In contrast to this, when the polyol is treated with AEROSIL® fumed silica or SIPERNAT® precipitated silica this is reliably avoided. An example of Xylitol treated with 1 wt% SIPERNAT® 50 S is shown in Figure 3 on the right side. Under the same storage condition the particles do not agglomerate or form lumps. It is still an easy-to-handle, free flowing powder. It reaches the flow grade 3.

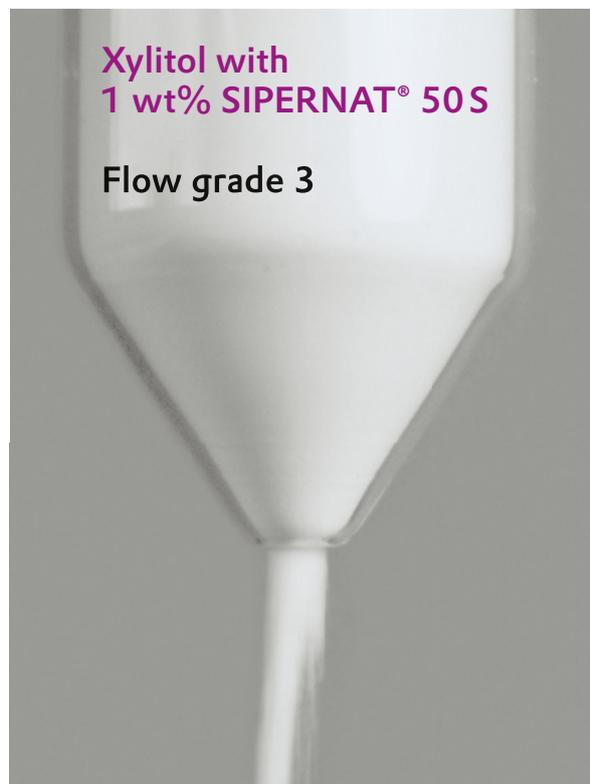
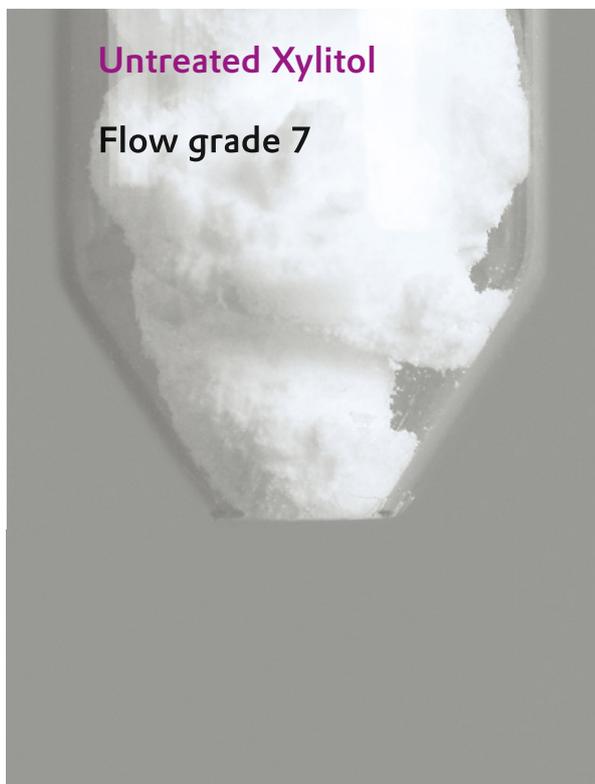


Figure 3

Xylitol (particle size max. 10% >250 μm , initial water content max. 0.5 wt%)

Left: untreated Xylitol with flow grade 7; **Right:** treated with 1wt% SIPERNAT[®] 50 S, flow grade 3

Mixing in tumbling-mixer type Turbula 45 rpm, 5min. After storage at ambient conditions in closed glass bottles for approximately one week

Example: poor flowability because of small particle size

Another reason for poor flowability and caking of sugars is the size of the particles. The finer the powder, the worse the flow is.

In the following graphs, two different disaccharides were tested for their caking behavior during storage at elevated temperature and humidity. The first one has a particle size of approximately 130 μm on average, the second one, with a mean-particle size between 50 to 100 μm , being even finer.

With a texture analyzer the hardness of the caked disaccharide was measured and the ability of various anti-caking aids to reduce this hardness was evaluated.

For both carbohydrates a dosage of less than 1 wt% of AEROSIL[®] or SIPERNAT[®] products is very efficient in reducing the hardness of the caked material. Figure 4 and 5 summarize the results of those tests.


Besides the obvious reduction in hardness, in Figure 4 the importance of adapting the mixing procedure can be seen. Depending on the material itself, the silica used and the dosage it is necessary to adjust the mixing time in combination with shear-intensity. In many cases, short mixing time at medium shear intensity results in the best anti-caking effect.

The second disaccharide, results are shown in Figure 5, cakes even harder, when untreated. Compared to the example in Figure 4, the hardness of caking here is more than doubled. This is because of the higher humidity during storage but also because of the smaller particles of the confectioner's sugar. Nevertheless, AEROSIL[®] and SIPERNAT[®] grades very efficiently minimize the caking tendency of this sugar, already less than 1 wt% silica addition results in a significant improvement. To reduce the caking of very fine powders, silica with fine particles itself offers the best performance, as for example AEROSIL[®] 200 F.

As those fine powders are often produced by milling, an efficient way of adding silica is directly during the milling step. After a short period of some seconds (or minutes) the silica is dispersed evenly which improves flowability, reduces caking and avoids clogging the mill. This often improves the throughput of the mill.

Figure 4

Reduction in hardness of caked disaccharides depending on type of flow aid added

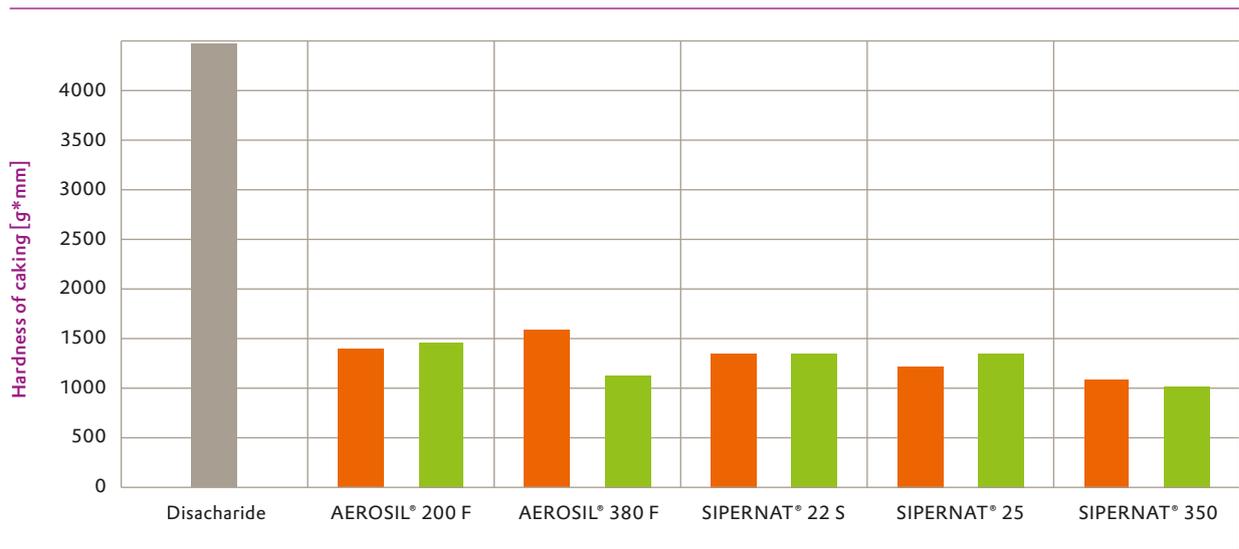


0.25 0.5 minutes mixing time at 400 rpm

1- α -Glucopyranosyl-1- α -glucopyranosid (mean particle size ~ 130 μ m) treated with 1 wt% Silica
Mixing conditions: vertical lab mixer (Somakon) for 0.25 or 0.5 minutes at 400 rpm
Storage at 30 °C, 40% rh, 4 days
Hardness determines the force necessary to scratch off a certain layer of the caked material

Figure 5

Reduction in hardness of icing sugar depending on silica dosage

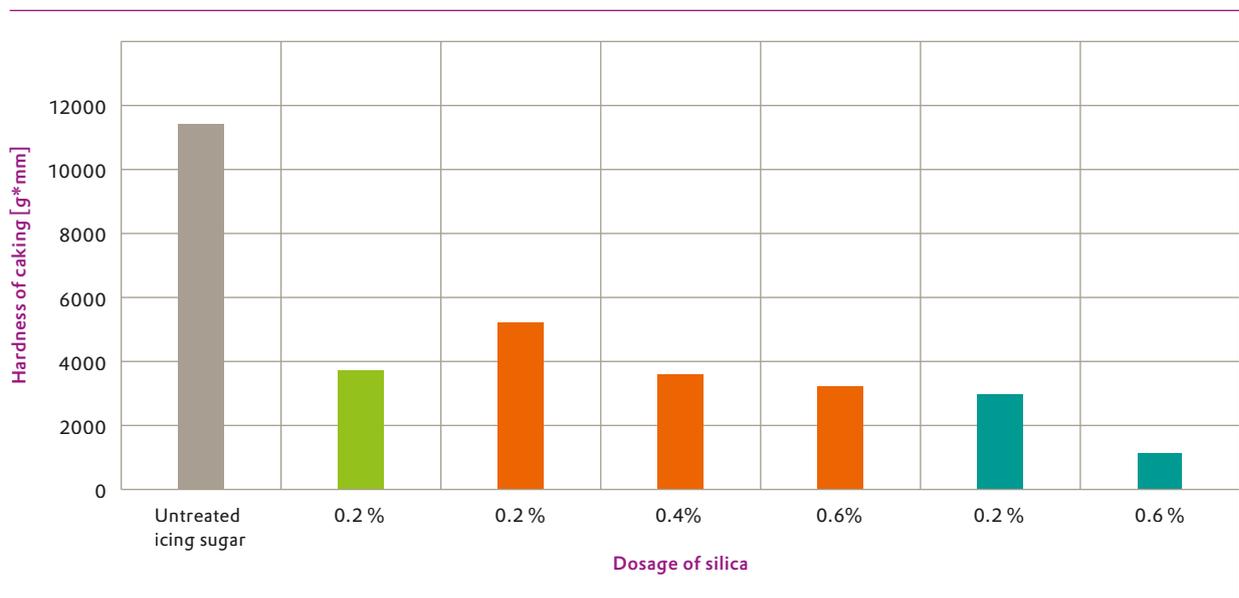

SIPERNAT® 22 S SIPERNAT® 350 AEROSIL® 200 F

100 g of confectioner's sugar (particle size between 50–100 μ m) treated with corresponding silica, dosage given as wt%
Mixing in lab mixer (Somakon) for 10 sec at 2000 rpm to simulate milling
Storage at 30 °C, 60% rh for 24 h
Caking represents the force needed to scratch off a certain layer of the caked icing sugar


Another aspect needs to be taken into consideration: dustiness

By reducing the adhesion forces of fine powders, the individual particles become freely movable and separate from each other. Because of this, it might happen that dustiness of this powder increases. As dust is inconvenient and a possible irritant during manufacturing and packaging processes it needs to be avoided reliably.

Figure 6 compares the influence of various silica grades and dosages on the caking behavior (horizontal axis) versus the effect on dustiness (vertical axis) of powdered sugar. This graph points out the options to reduce the caking of confectioner's sugar without increasing its dustiness.

It can be seen that especially SIPERNAT® 350 outperforms other flow aids with regard to both attributes. Here a dosage of about 0.4 wt% is already sufficient to reduce the caking significantly but not increase the dustiness. Higher dosages might bring only a limited additional advantage with regard to hardness of lumps, but there is the risk to generate some dust. Consequently, the type of flow aid used, its dosage and the milling conditions need to be optimized carefully.

Figure 6
Reduction in caking without dust-generation

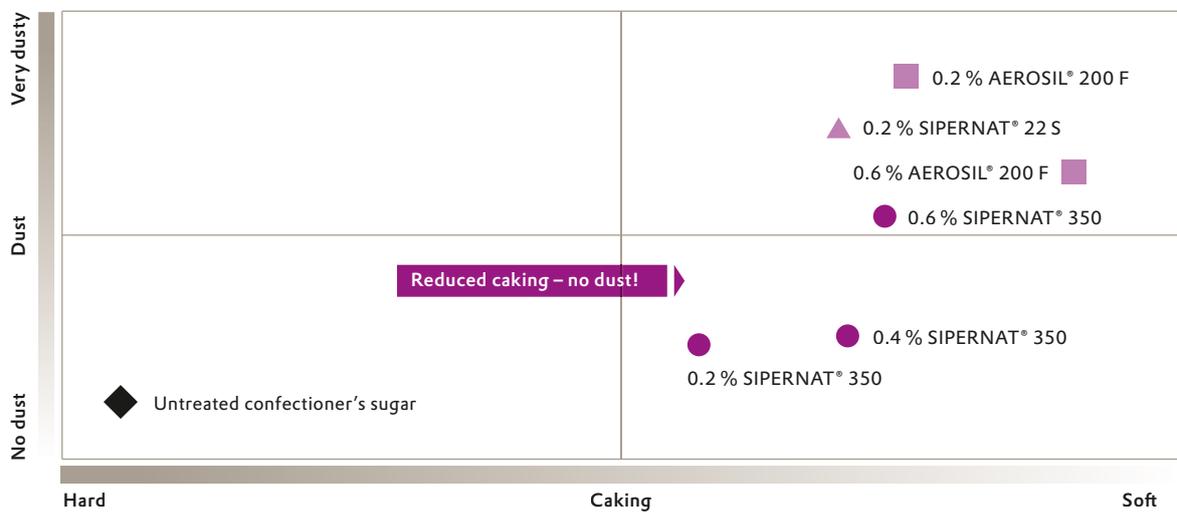

Confectioner's sugar (particle size between 50 – 100 µm) treated with corresponding silica, dosage given as wt%; mixing in lab mixer (Somakon) with varying duration at 2000 rpm to simulate milling
Dust measurement: Optical method, using light scattered by dust, equipment from Fa. Arndt/Germany
Storage at 30 °C, 60% rh for 24 h; caking represents the force needed to scratch off a certain layer of the caked icing sugar

Summary and recommendation

Depending on the causes of caking and poor flowability of powdered sugars the type of flow aid used and the mode of addition should be chosen accordingly. In Figure 7 the different reasons for caking and the effects of silica are summarized.

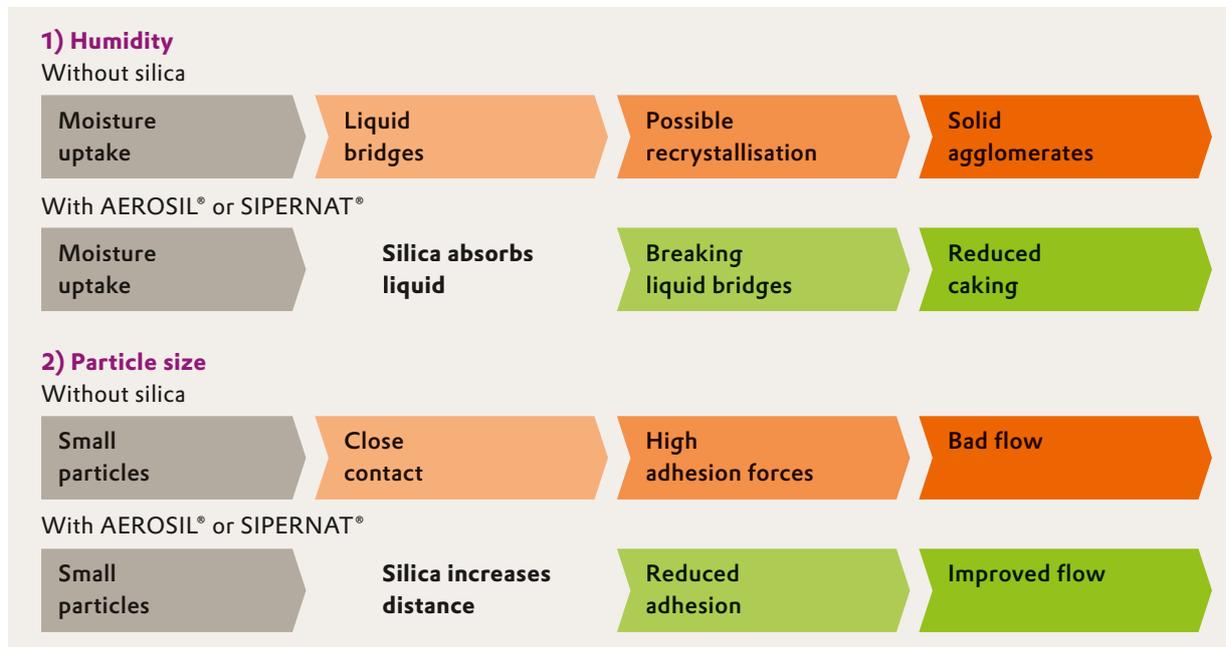


Figure 7

Reasons for caking of carbohydrates and mode of action of silica

In case of hygroscopicity, moisture-uptake is the main challenge, silica with a high absorption capacity, such as **SIPERNAT® 50 S**, will be beneficial.

When the particle size or fineness of the carbohydrate is the limiting factor for the flowability, flow aids, like **AEROSIL® 200 F** or **AEROSIL® 380 F** are a good choice. Because of their particle structure, they very efficiently improve flowability of small-sized powders.

For special applications – where besides flowability dustiness is an important aspect – **SIPERNAT® 350** offers a very good performance. Because of its fine particle size, it improves flowability efficiently, but does not increase dust.

For all powders the mode of mixing the flow aid into the material has a significant influence on the effectiveness of the silica.

Adapting the flow aid used, its dosage and the way of processing it depending on the individual condition and requirements, finally leads to a product with optimal powder and handling characteristics.

References

- [1] "Zucker und Zuckerwaren", H. Hoffmann, W. Mauch, W. Untze, Behr's Verlag, p53ff
- [2] "Polyols in Confectionery", British Journal of Nutrition (2001), 85, Suppl. 1, p31ff
- [3] „Handbuch Alkoholfreie Erfrischungsgetränke“, Südzucker AG (1998)
- [4] TI 1351 „SIPERNAT® specialty silica and AEROSIL® fumed silica as flow aid and anticaking agent, Evonik Industries AG

Please check regional availability and regulatory status of each type individually before use!

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

AEROSIL® and SIPERNAT® are registered trademarks of Evonik Industries or its subsidiaries.



EVONIK
INDUSTRIES

**Europe/Middle-East/
Africa/Latin America**

Evonik Resource Efficiency GmbH

Business Line Silica
Rodenbacher Chaussee 4
63457 Hanau-Wolfgang
Germany

PHONE +49 6181 59-12532

FAX +49 6181 59-712532

ask-si@evonik.com

www.evonik.com

North America

Evonik Corporation

Business Line Silica
299 Jefferson Road
Parsippany, NJ 07054-0677
USA

PHONE +1 800 233-8052

FAX +1 973 929-8502

ask-si-nafta@evonik.com

Asia / Pacific

Evonik (SEA) Pte. Ltd.

Business Line Silica
3 International Business Park
#07-18 Nordic European Centre
Singapore 609927

PHONE +65 6809-6877

FAX +65 6809-6677

ask-si-asia@evonik.com

Evonik. Power to create.